


access

# flexi access - flexi Step-Over

Safe access solutions designed and manufactured to current British Standards

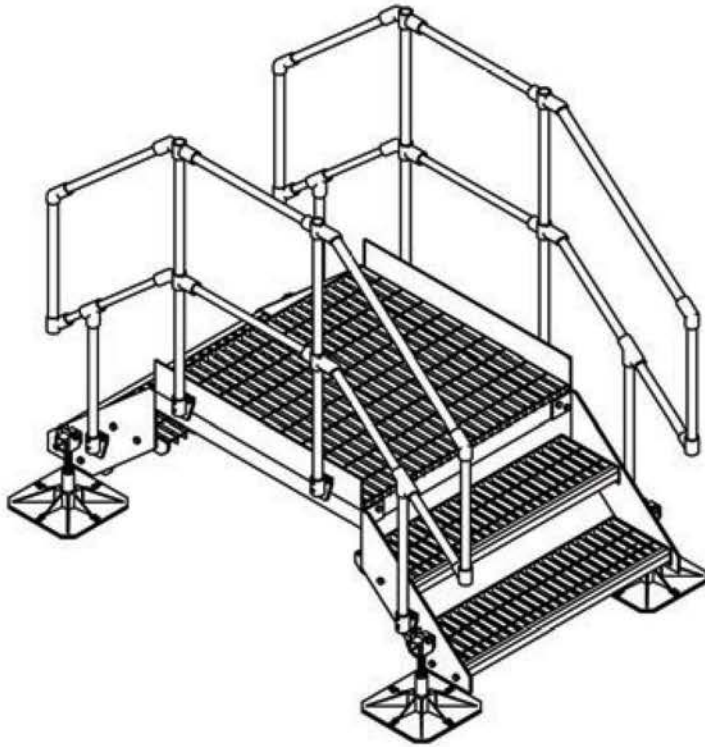

## Features & Benefits

- Non-penetrative support
- Site survey available
- Fast and simple installation
- Hot dip galvanised frameworks
- Fully working drawings prior to manufacture
- British Standard compliant and meets the Work at Height Regulations Act 2005
- Full AutoCAD drawing support offered
- Load management and wind calculations available
- Full on-site support and surveying services



Standard 2 step - Step-Over shown above (F-SO-2) supplied with 1000mm square landing and full handrail & kick plates.



Pump House  
 Glaisdale Drive East  
 Nottingham  
 NG8 4LY  
 Tel: +44(0)115 900 5858  
[www.flexisupportsystems.co.uk](http://www.flexisupportsystems.co.uk)  
[sales@flexisupportsystems.co.uk](mailto:sales@flexisupportsystems.co.uk)



everyday



light



heavy



solar



Flexi



# flexi safe access standard and custom solutions

With the introduction of the work at height regulations back in 2005, the regulations apply to all work at height where there is a risk of a fall liable to cause personal injury. This regulation places duty on employers, the self employed and any person that controls the work of others, e.g. facility managers, building owners/end users etc. Flexi access solutions are designed to current British Standards; we offer full working drawings, site surveys and all our access range is manufactured in the UK. GRP options are also available upon request. So whether it's a cat ladder, companion way ladder, stairs, ramps, walkways or a combination of all these, flexi access will provide you and your workforce with a safe access solution. We can also offer a custom design service to suit your needs.

## Typical Hop-Over - ideal to bridge over low level pipework and cable trays



Part Code - F-HO-1000 Hop-Over with optional handrails



Part Code - F-HO-600 Hop-Over with optional handrails



Part Code - F-HO-HR Handrail (optional) these are sold separately

Part Code	Description	Tread Qty	Landing Size	Clearance Height	Foot Size
F-SO-2	Flexi Step Over 2up / 2 down	2up / 2 down	1000 mm x 1000 mm	560 mm	320 mm x 320 mm
F-SO-3	Flexi Step Over 3up / 3 down	3up / 3 down	1000 mm x 1000 mm	780 mm	320 mm x 320 mm
F-SO-4	Flexi Step Over 4up / 4 down	4up / 4 down	1000 mm x 1000 mm	1000 mm	320 mm x 320 mm
F-HO-600	Flexi Hop Over - 600 mm	-	1000 mm x 600 mm	180 mm	320 mm x 320 mm
F-HO-1000	Flexi Hop Over - 1000 mm	-	1000 mm x 1000 mm	180 mm	320 mm x 320 mm
F-HO-HR	Flexi Hand Rail for Hop Over	-	-	-	-



Flexi

## Specification Extract

Standard/custom access to be supplied by Pump House, fully adjustable and hot dipped galvanised solutions and supported on 320mm square UV stabilised 100% polypropylene feet. Tel: +44(0)115 900 5858

## Application

Step-Over to bridge over ducts, pipes and electrical containment; custom solutions to access maintenance doors to AHU's, chillers or other rooftop services, ramped access solutions where wheelbarrow/sack barrows are used and straight-forward elevated access solutions. Cat ladders and companion way ladder also available.

## Material Specification

- Foot - 320mm square UV stabilised 100% polypropylene
- Mat - 320mm feet only, 100% natural rubber, (mat is adhered to the foot)
- Legs - Step-Over 48mm dia. 3mm steel tube with M24 stud adjuster and 3mm thick U-clevis to top. Hop-Over 40 x 40 x 2mm SHS
- Handrails - Step-Over 33.7mm diameter mild steel.
- Treads/Flooring - 25 x 3mm open grid flooring. (41/100 bearing bars) and designed to 7.5kN/m<sup>2</sup> loading BS:4592 part 1
- Finish - Hot dip galvanised steelwork BS EN 10219:1997. Galvanising: BS EN ISO 1461:1999. Salt mist testing: BS EN 60068-2-52

## Our service offers you

- Quotation on request
- Full AutoCAD drawings support
- Site support and site surveys
- Load management calculations
- Over 20 years experience in flat roof design and providing support systems to building services
- Fast delivery
- Experienced in-house technical staff